

Description	Compressed air lubricator of solid design and small size. Proven in operation and suitable for many applications. Available in all standard sizes and in many versions.
Bowl	metal version with or without sight glass
Operating pressure	max. 17 bar for metal bowl with sight glass max. 21 bar for metal bowl without sight glass
Temperature range	0 °C to 70 °C / 32 °F to 158 °F for metal bowl with sight glass, from G $\frac{3}{4}$ on 0 °C to 80 °C / 32 °F to 176 °F for metal bowl with/without sight glass for appropriately conditioned compressed air down to -30 °C / -22 °F
Material	Body: zinc die-cast Bowl: zinc die-cast or steel Elastomer: NBR/Buna-N



Dimensions			Bowl	Flow	Operating	Connection	Order	A*
A	B	C	design	rate	pressure	thread	number	
mm	mm	mm	made of/ with	l m ³ /h*1	l/min*1	max. bar	G	

„Standard“ lubricator								L606	
103	251	184	metal/sight glass	0.50	492	8200	17	G $\frac{3}{4}$	L606-06W
103	340	273	steel	1.00			21		L606-06E
103	306	239	steel/sight glass	2.00			17		L606-06G
103	251	184	metal/sight glass	0.50	540	9000	17	G1	L606-08W
103	340	273	steel	1.00			21		L606-08E
103	306	239	steel/sight glass	2.00			17		L606-08G
122	266	194	metal/sight glass	0.50	1020	17000	17	G1 $\frac{1}{4}$ *2	L606-10W
122	355	283	steel	1.00			21		L606-10E
122	300	228	steel/sight glass	2.00			17		L606-10G
122	266	194	metal/sight glass	0.50	1020	17000	17	G1 $\frac{1}{2}$	L606-12W
122	355	283	steel	1.00			21		L606-12E
122	300	228	steel/sight glass	2.00			17		L606-12G






Special options, add the appropriate letter

flange connection see chapter for stainless steel devices / flanges L606-...F.



Lubricator
18

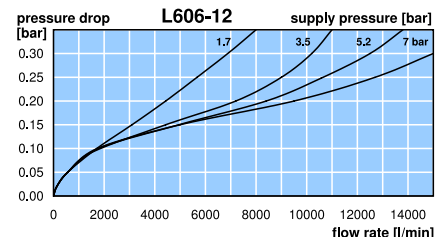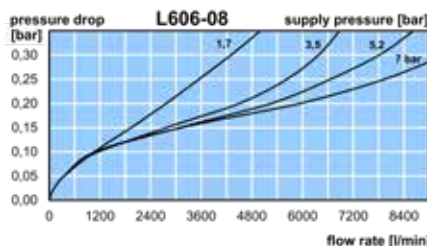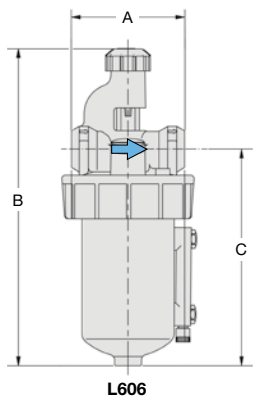

*1 at 7 bar operating pressure and 0.33 bar pressure drop

* Product group

Extensions: see chapter for FRL service units

PDF CAD
www.aircom.net

Order example:
L606-06W